


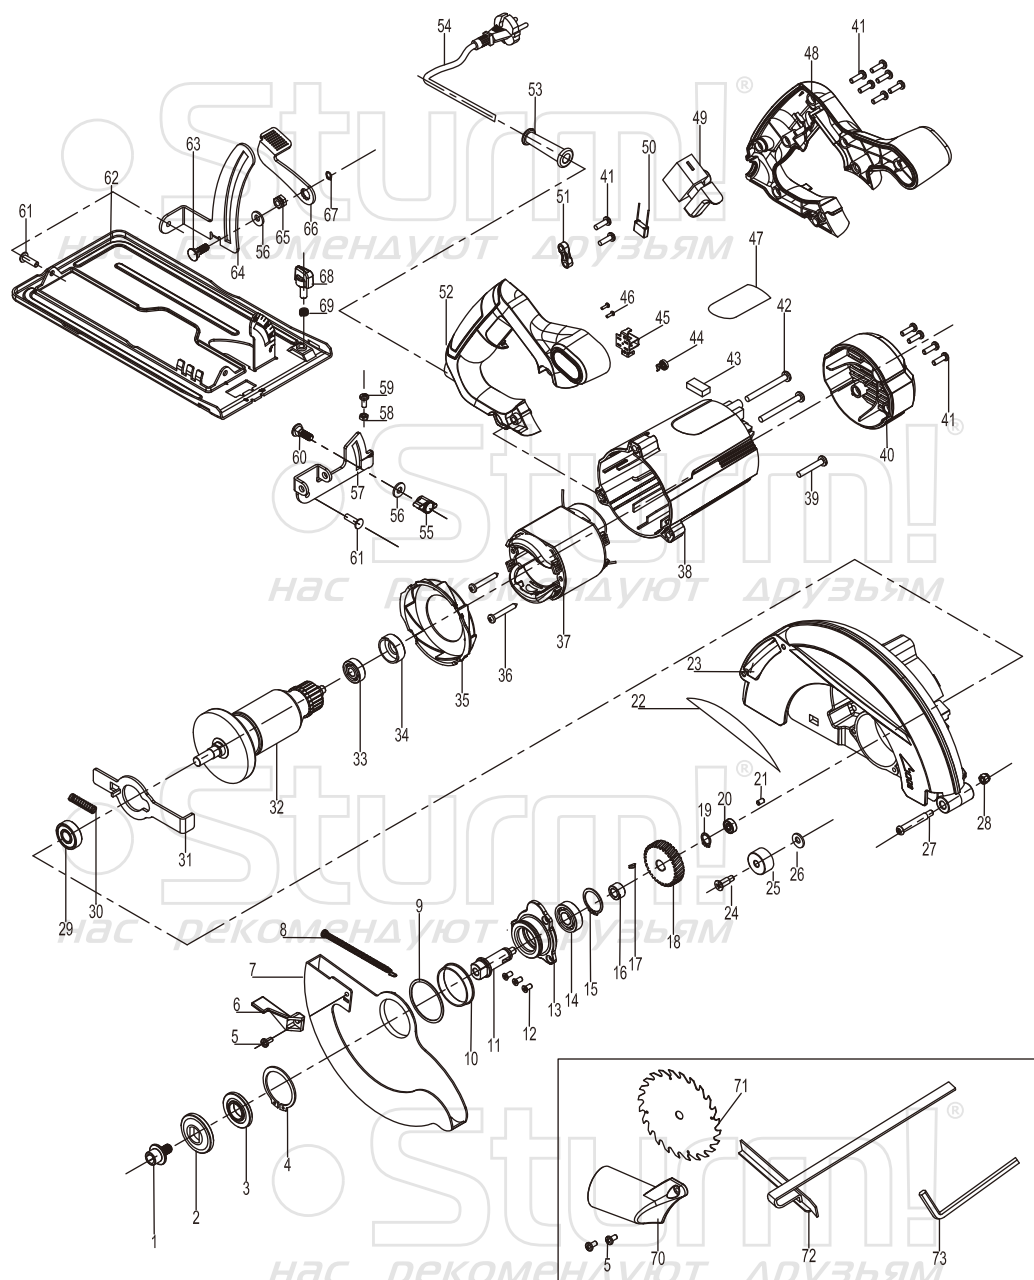

CS50190

NO.	DESCRIPTION	NO.	DESCRIPTION
1	HEXAGONAL FLANGE BOLT M8×14	38	MACHINE CASING
2	TOP BOARD	39	SCREW M5×25
3	LOWER PLATEN	40	REAR COWL
4	RETAINING RING 38	41	SCREW ST4.2×14-F
5	SCREW M4×8	42	SCREW M5×45
6	ACTIVITY COVER WRENCH	43	CARBON BRUSH
7	ACTIVITY SHIELD	44	COIL SPRING
8	EXTENSION SPRING: $\Phi 5.2 \times \Phi 0.7 \times 88$	45	CARBON BRUSH HOLDER
9	FLAT WASHER: 39MM X 43MM X 1.2MM	46	SCREW ST2.9×8-F
10	PLASTIC JACKET	47	PARAMETER LABEL
11	OUTPUT SHAFT	48	LEFT HANDLE
12	SCREW M4×10	49	SWITCH
13	NON-PRESSURE HEAD	50	CAPACITANCE
14	BEARING 6001-2RS	51	CABLE CLAMP PLATE
15	GASKET 28	52	RIGHT HANDLE
16	POSITIONING STEEL SLEEVE	53	CABLE SHEATH
17	SEMI-CIRCULAR KEY 3×10	54	CABLE
18	RACK WHEEL	55	LOCKING KNOB ASSEMBLY
19	GASKET 12	56	FLAT WASHER 6×14×1.5
20	BEARING 606-2Z	57	ANGLE ADJUSTMENT STAND
21	RUBBER CYLINDER $\Phi 4 \times 7$	58	NUT M4
22	CUSTOM-MADE LABEL	59	SCREW M4×10
23	HEAD CAPSULE	60	SCREW M6×14
24	SCREW M5×18	61	BOLT 5×7
25	POSITIONING RETAINING RING	62	BASEPLATE
26	FLAT WASHER 6×20×1.5	63	SCREW M6×16
27	SCREW M5×40	64	DEEP ACTIVITY STAND
28	NUT M5	65	NUT M6×6.5
29	BEARING 6000-2RS	66	LOCKING WRENCH
30	SPRING: $\Phi 7.3 \times \Phi 0.7 \times 33$	67	GASKET 10
31	SELF LOCK PIECE	68	SCREW DOWN THE KNOB
32	ARMATURE	69	COMPRESSION SPRING: $\Phi 8.2 \times \Phi 0.8 \times 3$
33	BEARING 607-2RS	70	EXTRACORPOREAL TRANSFER CONNECTOR
34	BEARING 607-2RS BEARING BUSHING	71	SAW BLADE: 190×20×2.4×24T
35	BREAK WIND RING	72	GUIDE RULER
36	SCREW ST4.2×55-F	73	HEXAGONAL SOCKET WRENCH 6
37	STATOR		